



PU-507WPRX

**5-Play HDBaseT™ Wall Plate Receiver
(inc. PoC & single LAN, up to 100m)**

OPERATION MANUAL

DISCLAIMERS

The information in this manual has been carefully checked and is believed to be accurate. CYP (UK) Ltd assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

CYP (UK) Ltd assumes no responsibility for any inaccuracies that may be contained in this document. CYP (UK) Ltd also makes no commitment to update or to keep current the information contained in this document.

CYP (UK) Ltd reserves the right to make improvements to this document and/or product at any time and without notice.

COPYRIGHT NOTICE

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from CYP (UK) Ltd.

© Copyright 2019 by CYP (UK) Ltd.

All Rights Reserved.

Version 1.1

TRADEMARK ACKNOWLEDGMENTS

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

REVISION HISTORY

VERSION NO.	DATE	SUMMARY OF CHANGE
V1.00	29/01/13	First Release
V1.01	08/10/13	First Release
v1.02	01/07/19	Updated diagrams

CONTENTS

1. Introduction	6
2. Applications	6
3. Package Contents	6
4. System Requirements	6
5. Features	7
6. Operation Controls and Functions	8
6.1 Receiver Front Panel	8
6.2 Receiver Rear Panel	9
6.3 IR Cable Pin Assignment	9
6.4 D-sub 9-pin Cable Definitions	10
7. Connection Diagram	11
Option 1: Point to Point	11
Option 2: Matrix System	12
8. Specifications	13
8.1 Technical Specification	13
8.2 CAT5e/6/7 Cable Specification	14
9. Acronyms	14

1. INTRODUCTION

The HDMI over Single CAT5e/6/7 Wall-plate Receiver is designed to receive uncompressed video, audio and IR control data from a compatible transmitter over a single run of CAT5e/6/7 cable at a distance of up to 100 metres. It has the added benefit of control through the built-in RS-232 and IR ports and a bi-directional LAN serving connection. Additionally, it can be powered by a compatible transmitter unit via the Power over Cable (PoC) functionality allowing for greater flexibility in installations.

2. APPLICATIONS

- /// Extend an HDMI signal to a remote location
- /// Household entertainment sharing and control
- /// Showroom display and control
- /// Classroom display and control

3. PACKAGE CONTENTS

- /// 1×HDMI over Single CAT5e/6/7 Wall-plate Receiver
- /// 1×IR Extender
- /// 1×Operation Manual

4. SYSTEM REQUIREMENTS

- /// HDMI equipped source device (connected with HDMI cables) or DVI equipped source (connected with DVI to HDMI cables)
- /// HDMI equipped display (TV or monitor) or AN HDMI equipped AV receiver, connected with HDMI cables
- /// Industry standard CAT5e/6/7 cable
- /// Compatible PoC HDBaseT™ Receiver

5. FEATURES


- /// HDMI with 3D, 4K2K support, HDCP and DVI compliant
- /// Simultaneous transmission of uncompressed data over a single 100m CAT5e/6/7 cable (70m for 4K2K signals)
- /// Uncompressed video support up to 1080p@60 Hz/36-bit
- /// High definition audio support up to LPCM 7.1CH, Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio
- /// HDBaseT™ 5PlayT™ convergence: uncompressed high definition Video and Audio, LAN serving, Power over Cable (PoC) and RS-232/IR control
- /// Supports HDCP repeater and CEC bypass functions
- /// Easy to install wall plate design

Note:

1. *This system was tested with CAT6/23AWG and CAT5e/24AWG cables, results may vary with cables of a different specification.*
2. *The PoC function requires a compatible Transmitter unit. Transmitters from other brands may not be compatible.*
3. *For playback of 4K2K HDMI source signals, a 4K2K capable display and High Speed HDMI cables are required.*


6. OPERATION CONTROLS AND FUNCTIONS

6.1 Receiver Front Panel

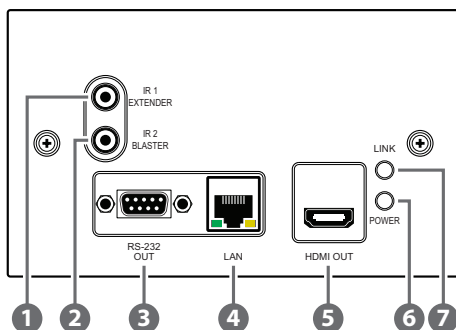



- 1 **IR 1 EXTENDER:** Connect an IR Extender cable for IR signal reception. Signals received will be transmitted from any IR blaster connected to the transmitter unit. Ensure that the remote being used is within the direct line-of-sight of the IR Extender.
- 2 **IR 2 BLASTER:** Connect an IR Blaster cable for IR signal transmission. IR signals received by an IR extender connected to the transmitter unit will be transmitted by this blaster. Place the IR Blaster in direct line-of-sight of the equipment to be controlled.
- 3 **RS-232 OUT:** Connect to the device that is to be controlled (via D-sub 9-pin female cable) by RS-232 commands.
- 4 **LAN:** Connect to an active network for LAN serving. When the transmitter or any compatible LAN equipped receivers are connected to a network, this allows the network access (including internet access if available) to be shared between the receiver and all connected receivers. Connect any Ethernet equipped device e.g. a Smart TV or games console to the LAN port of a receiver for that device to share the network/internet access.
- 5 **HDMI OUT:** Connect to a HDMI equipped TV/monitor for display of the HDMI input signal.
- 6 **POWER LED:** This LED will illuminate when the device is connected to a power supply or powered by another unit via PoC.
- 7 **LINK LED:** This LED will illuminate when both the source connected to the transmitter and the display connected to the receiver are connected.

6.2 Receiver Rear Panel

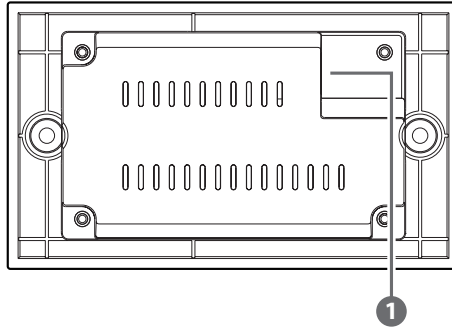

- 1 **CAT5e/6/7 IN:** Connect to the transmitter unit with a single CAT5e/6/7 cable for transmission of all data signals.

6.3 IR Cable Pin Assignment

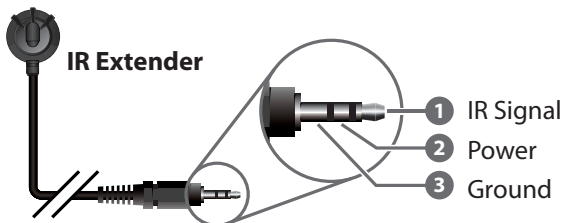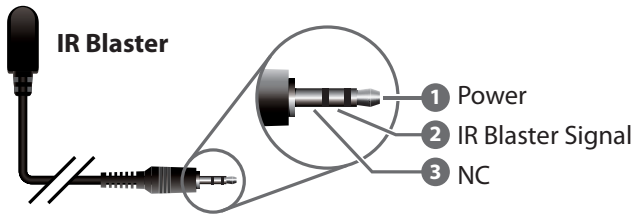


6.4 D-sub 9-pin Cable Definitions


PIN	DEFINITION
1	N/C
2	TxD/RxD
3	RxD/TxD
4	N/C
5	GND
6	N/C
7	N/C
8	N/C
9	N/C

7. CONNECTION DIAGRAM

Option 1: Point to Point

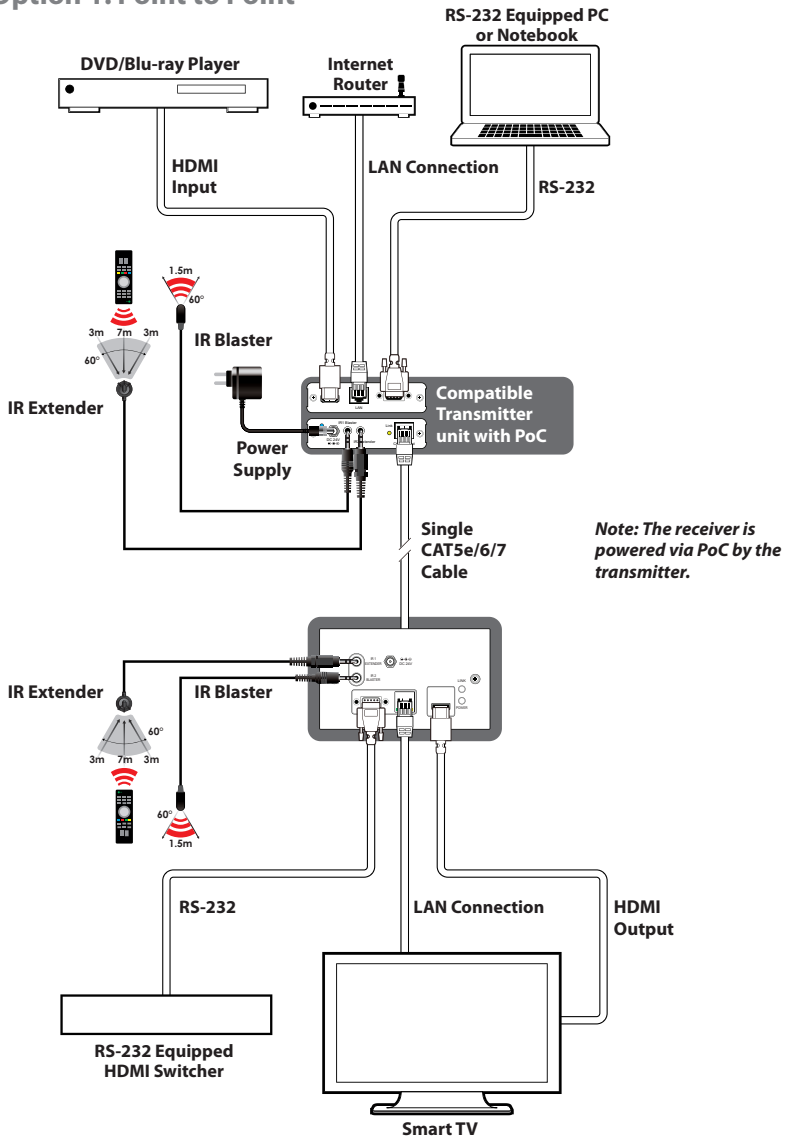

Option 2: Matrix System

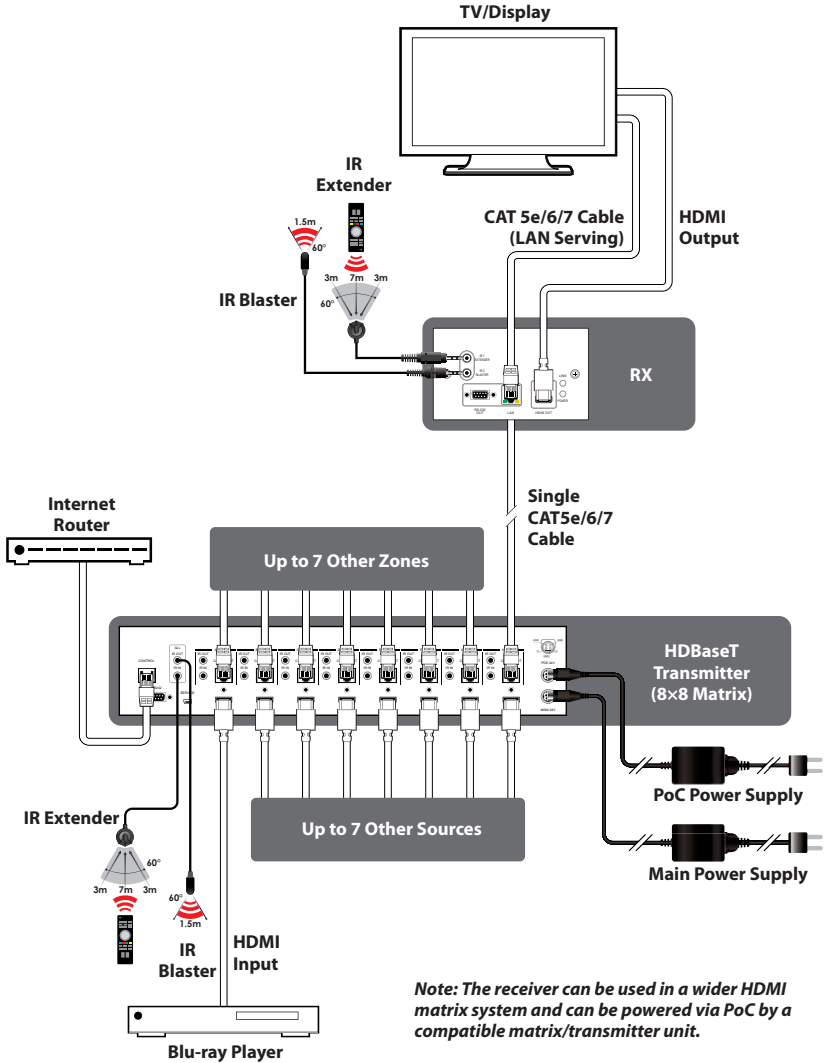

8. SPECIFICATIONS

8.1 Technical Specification

Video Bandwidth	300 MHz/10.2 Gbps
Input Ports	1×CAT5e/6/7, 1×LAN, 1×IR Extender
Output Ports	1×HDMI, 1×RS-232, 1×IR Blaster
ESD Protection	Human-body Model: ±8 kV (air-gap discharge) ±4 kV (contact discharge)
IR Frequencies	20~60 kHz (under optimal conditions)
Dimensions	145.7 mm (W)×85.7 mm (D)×36.5 mm (H)/ Jacks Excluded 145.7 mm (W)×85.7 mm (D)×39.5 mm (H)/ Jacks Included
Weight	160 g
Chassis Material	Plastic
Colour	White
Operating Temperature	0°C~40°C/32°F~104°F
Storage Temperature	-20°C~60°C/-4°F~140°F
Relative Humidity	20~90 % RH (non-condensing)
Power Consumption	12 W (PoC), 9 W (Main)

8.2 CAT5e/6/7 Cable Specification

Cable Type	Range	Pixel Clock Rate	Video Data Rate	Supported Video
CAT5e/6/7	100 m	≤225 MHz	≤5.3 Gbps (HD Video)	Up to 1080p, 60 Hz, 36-bit 3D (Data rates lower than 5.3 Gbps or below 225 MHz TMDS clock).
	70 m	>225 MHz	>5.3 Gbps (Ultra HD Video)	4K2K, 30 Hz video formats

9. ACRONYMS

ACRONYM	COMPLETE TERM
CAT5e	Category 5 Cable
CAT6	Category 6 Cable
CEC	Consumer Electronics Control
DVI	Digital Visual Interface
HDCP	High-bandwidth Digital Content Protection
HDMI	High Definition Multimedia Interface
IR	Infrared



CYP (UK) Ltd., Unit 7, Shepperton Business Park, Govett Avenue, Shepperton,
Middlesex, TW17 8BA

Tel: +44 (0) 20 3137 9180 | Fax: +44 (0) 20 3137 6279

Email: sales@cypeurope.com

www.cypeurope.com

v1.02